
UCB

REVOLUTIONIZE YOUR END-OF-LINE [PACKAGING] PERFORMANCE

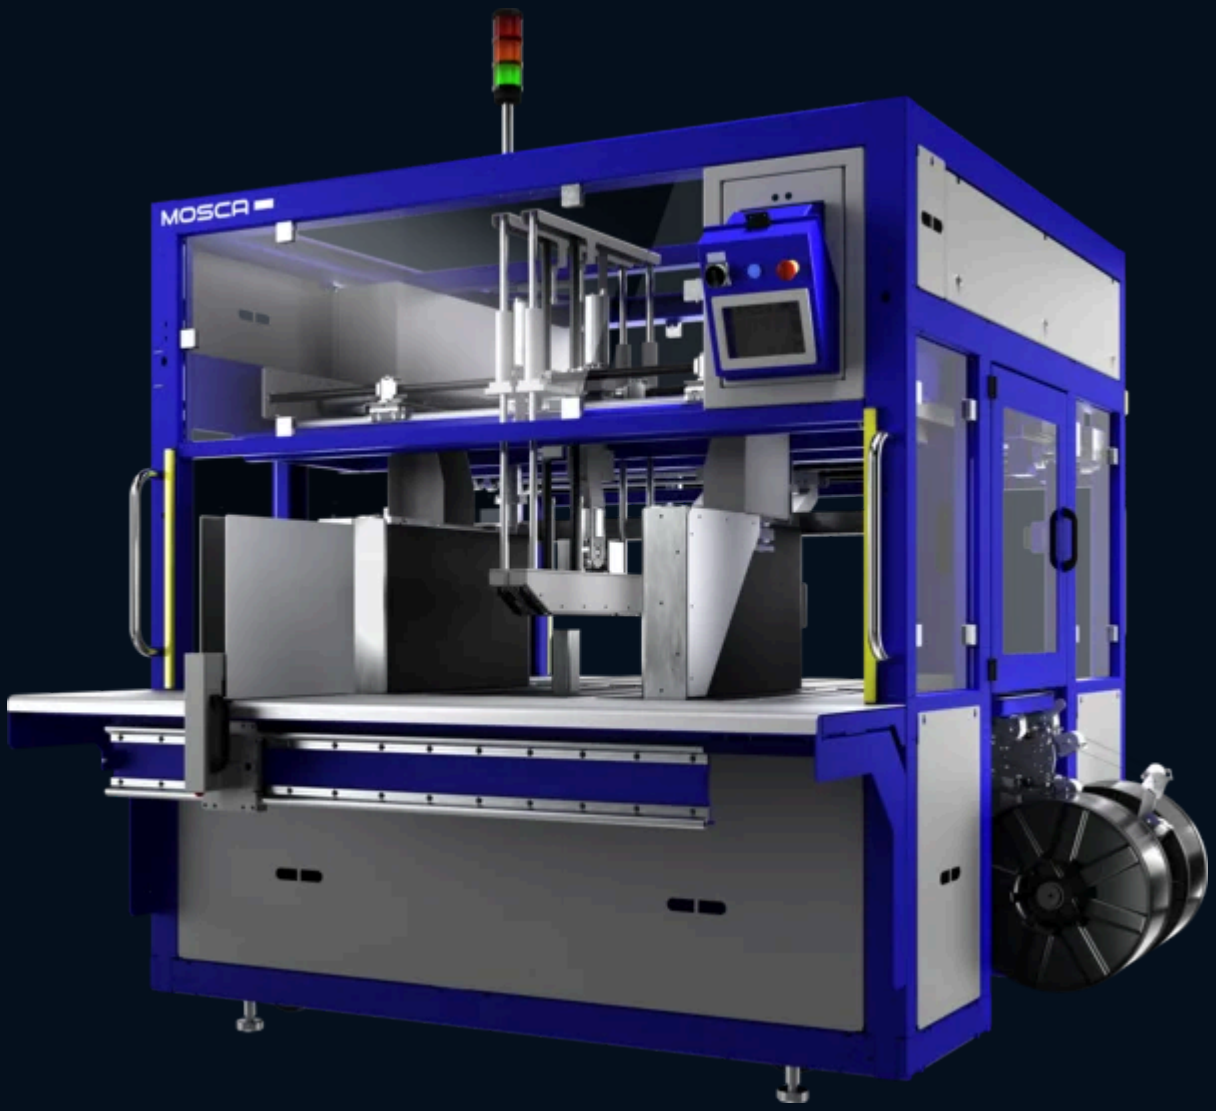

MOSCA

www.mosca.com
info@mosca.com | +49 6274 / 932-0

Subject to change 11/2026

UCB

FULLY AUTOMATIC CORRUGATED CARDBOARD STRAPPING MACHINE

The UCB efficiently UCB complex 4- and 6-point folding cartons. An optional rear product discharger ensures optimal positioning of the productproduct in the packaging position. Effortless replacement of the framing unit allows for easy switching between belts of different widths.

The UCB also UCB trimming and banding in a single machine: Both options are available in the same UCB alignment station; switching between them is quick and easy.

KEY BENEFITS

- Fully automatic strapping machine
- SoniXs| Standard-6
- Energy-efficient electric drives
- Suitable for PP and banding (optional)

NONSTOP RESPONSIBLE
NONSTOP RELIABLE
NONSTOP INTELLIGENT
NONSTOP PROGRESSIVE

MACHINE DESCRIPTION

SoniXs ultrasonic sealing system the Standard-6 model

High availability due to controlled frame

5-sided electromechanical package alignment

Infinitely adjustable transport speed from 0.1 - 1.0 m/s

Laterally driven conveyor belts

Driven upper belts

Energy-efficient electromechanical stop

Energy-efficient electromechanical hold-down device

Intuitive, color touch panel with ergonomic positioning option

ATR - Automatic clock rate control

Easy maintenance thanks to semi-automated removal of the strapping unit

Automatic format setting through selectable recipes

CE Marking, including Declaration of Conformity

OPTIONS

Fully automatic reel change due to double dispenser

Signal light (LED)

Parcel aligner from behind

Second package stop for second strapping

Preliminary end-of-band query with signal to the control unit

Outfeed table for use on both sides

Banding Machine (technical specifications are subject to change)

TECHNICAL DATA

Performance
Up to 32 single strappings/min
Up to 20 double strappings/min with two stops, at 1.0 m/s conveyor speed

Conveyor technology

Height:	From 800 mm to 1,000 mm (on swivel castors) From 970 mm to 1,150 mm (optional)

Strap coil dispenser

Core diameter:	200 mm
Core length:	190 mm

Weight
1,600 kg (with a Passage width 1,250 mm, without options)
2,000 kg (with a Passage width 1,650 mm, without options)

Passage width
1,250 mm
1,650 mm

Strapping Material

PP :	Width: 5 mm - 12 mm Thickness: 0.40 mm - 0.63 mm

Electrics

Mains voltage:	100 - 240 V, 50/60 Hz, 1L+N+PE (other mains voltages available on request)
Power consumption:	0.6 kW

Size specifications (in mm)

	Length	Width	Height
Minimum package size	150	105	20
Max. package size	1.400	1,200/1,600	400

(without a package aligner at the rear)

TECHNICAL DRAWINGS

