


Dynamic 2100

Battery powered plastic strapping tool

Order from Allstrap 866-779-2673

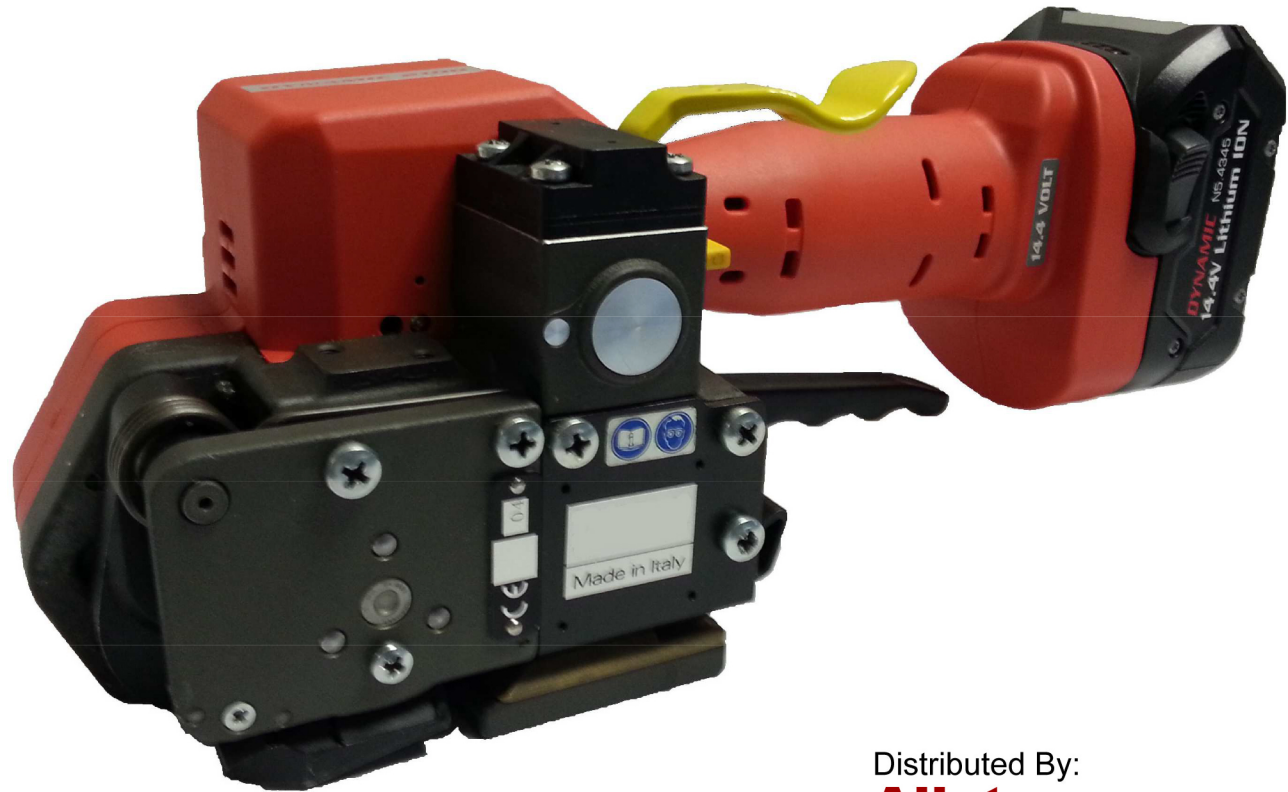

Distributed By:

Allstrap

1719 Kenny Rd
Columbus, OH, 43212

**Versatile and user-friendly strapping tool
for most applications in all industrial sectors.**

Dynamic 2100

Order from Allstrap 866-779-2673

Characteristics

Dynamic 2100

Strapping qualities:	PET (Polyester) and PP (Polypropylene) plain or embossed
Strapping dimensions:	widths 16.0 - 19.0 mm / 5/8 - 3/4" thicknesses 0.65 - 1.27 mm / .026 - .050"
Weight:	4.3 kg / 9.5 lbs
Average seal strength:	approx. 75 %
Sealing method:	Friction weld
Tensioning force:	650 - 3000 N / 146 - 675 lbs adjustable
Tensioning speed:	160 - 230 mm/s / 6.3 - 9 inch/sec.
Power supply:	Li-Ion battery 14.4 VDC / 3 Ah

Advantages:

- Light and versatile strapping tool
- Robust and durable design
- Well proven strapping technology
- Simple one-handed operation
- Excellent cost - performance ratio
- Latest Li-Ion battery technology



Distributed By:
Allstrap

1719 Kenny Rd
Columbus, OH, 43212



Item No.	Model	Strap width		Strap thicknesses	
		mm	inch	mm	inch
43.3212	DYNAMIC 2100/16/0.65-1.05	16.0	5/8"	0.65-1.05	.026-.041
43.3222	DYNAMIC 2100/19/0.65-1.05	19.0	3/4"	0.65-1.05	.026-.041
43.3223	DYNAMIC 2100/19/1.06-1.27	19.0	3/4"	1.06-1.27	.042-.050