

3.6 TECHNICAL DATA AND NOISE

- | | |
|-------------------------------|---|
| - Overall dimensions | See Picture 36 - pag. 59 |
| - Net weight of machine body | 350 kg |
| - Supply voltage | 230 Volt |
| - Frequency | 50/60 Hz |
| - Phases | (single-phase + neutral + earth) |
| - Nominal current | 10 A |
| - Leakage current | about 25mA |
| - Power installed | 1 kW (std)
1.2 kW (variable pre-stretch
trolley three rollers two motors) |
| - Stretch film | 17/30 µm |
| - Roll-holder tube inside Ø | 76 mm |
| - Roll height | 500 mm |
| - Maximum roll weight | 16 kg |
| - Carriage speed | 1 ÷ 4 m/min |
| - Turntable speed min. ÷ max. | 4 ÷ 12 rpm |

Noise

In observance of annex 1 of machine directive 2006/42/EC, the manufacturer declares that the noise emitted by the machine in question falls within the limits established by the above mentioned regulations 70 dB(A).





MACHINE DIMENSIONS

RAMP DIMENSIONS

Ø	A	B	D	E	F	Std	Opt	Opt	Opt	Opt	H	I
						2450	2700	3000	3300	3700		
1500	1510	2350	2700	75	1400	2750	3000	3300	3600	4000	1000	1500
1650	1660	2350	2700									
1800	1810	2650	3000									
2200	2230	3050	3400									

PRESSER DIMENSIONS

Std	Opt	Opt	Opt	Opt	Std	Opt	Opt	Opt	Opt						
2450	2700	3000	3300	3700	2450	2700	3000	3300	3700	2450	2700	3000	3300	3700	
L	L	L	L	L	M	M	M	M	M	N	O	O	O	O	O
2650	2950	3250	3550	3950	2050	2300	2600	2900	3300	500	2050	2300	2600	2900	3300

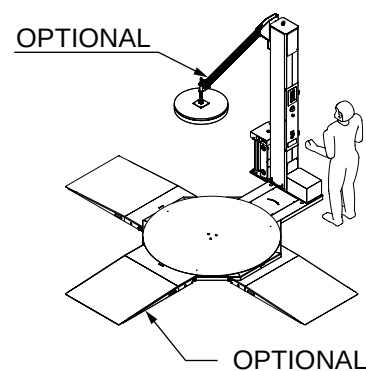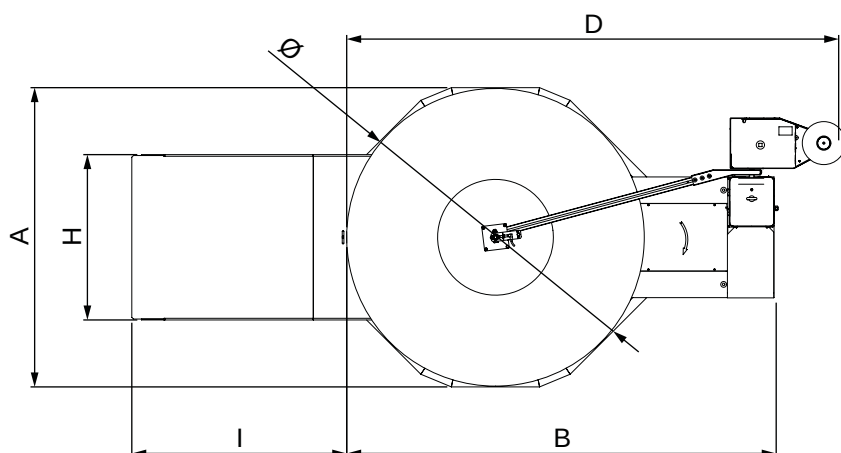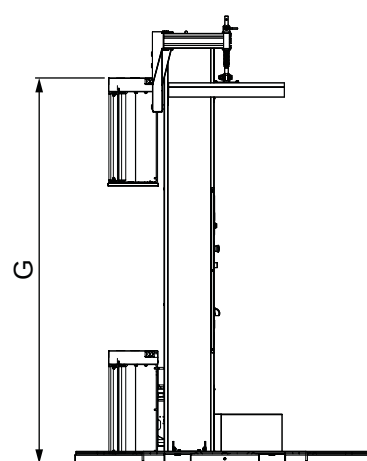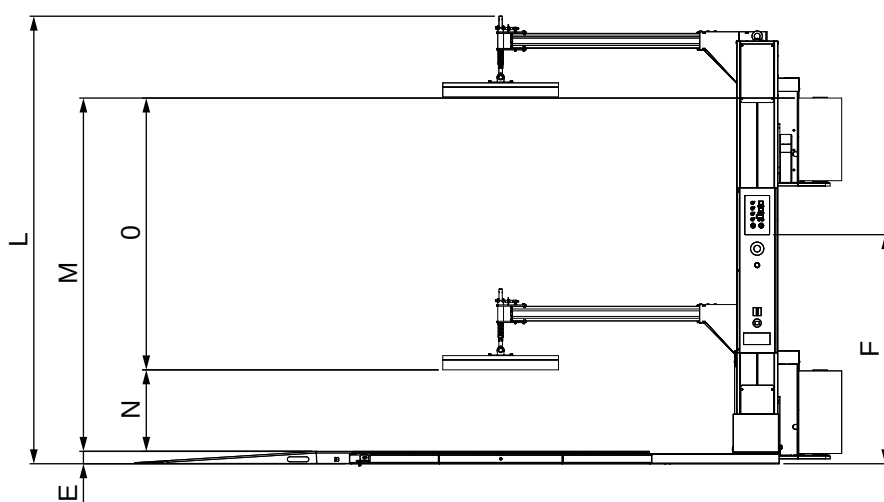

Picture 36